Water Monitoring Equipment & Supplies

High Performance Submersible Pumps

even greater lift


Proactive Environmental products	w aterra introduces new High Performance Submersible Pumps — de- signed specifically by Proac- tive™ for well purging and sampling procedures.	
WSP-19V-2	All of these pumps can greatly speed up the process of purging	
WSP 24V-3	and sampling monitoring wells, especially if dedicated installa- tions are used.These pumps are complete and ready to use.	
WSP-12V-3B		The addition and the addition and the
	features	
WSP-24V-4	CAN OPERATE UNDER HARSH CONDITIONS & HIGHER TURBIDITY	
	 RUNS CONTINUOUSLY IN WATER WITHOUT THE NEED FOR A COOL DOWN 	9
WSP-24V-5	SLEEK EXTERIOR MINIMIZES WELL HANG-UPS	
WSP-24V-6	 RELIABLE DESIGN IS SUITABLE FOR CONTINUOUS SAMPLING & PURGING OF GROUNDWATER WELLS 	HIGH PERFORMANCE PUMP IN ACTION
	VERY RELIABLE & ECONOMICAL	FIGH FERFORMANCE FUMP IN ACTION
	• 400 HOUR MOTOR LIFE	

WSP-I2V-3B (Super Twister[®])

This revolutionary pump is capable of pumping up to 85 feet from ground level by simply connecting it to a 12 volt battery. With Constant Voltage **Booster Technology (CVBT)** built in, the problem of fuses blowing is eliminated. If your battery should fall below 10.75 volts, the built-in booster will recognize the low voltage and the pump will start pulsating. The CVBT outputs a constant voltage to the pump motors which reduces voltage drop due to battery drainage.

It comes supplied with 90 feet of heavy duty 12 gauge wire and battery clamps.

12 VOLT / LENGTH - 17"

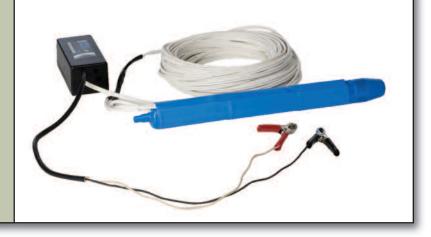

WSP-19V-2 (Mega-Typhoon®)				
This pump is capable of pumping up to 80 feet from ground level by simply connecting the PA-10600 (Power Booster I) Controller or the PA- 10650 (Low flow with Power Booster I) Controller, then connecting the controller's positive and negative	It comes supplied with 90 feet of heavy duty 12 gauge wire and a yellow connector.			
alligator clamps to the 12 volt battery.	19 VOLT / LENGTH — 12"			
	WSP-24V-3 (Tsunami [®])			
This pump is capable of pumping up to 100 feet from ground level by simply connecting it to a 12 volt battery. Its reliable design is suitable for continuous sampling and purging of groundwater wells. Use with the PA-10700 (Power Booster 2) or the PA-10750 (Low Flow with Power	It comes supplied with 110 feet of heavy duty 12 gauge wire and a green connector.			
Booster 2) Controllers.	24 VOLT / LENGTH — 17"			
WSP-24V-4 (Monsoon®)				
This pump is capable of pumping up to 120 feet from ground level by simply connecting it to a 12 volt battery. Use with the PA-10700 (Power Booster	It comes supplied with 35 feet of heavy duty 12 gauge wire, a cigarette plug and battery clamps.			
2) or the PA-10750 (Low Flow with Power Booster 2) Controllers.	24 VOLT / LENGTH — 20"			
WSP-24V-5 (Hurricane®)				
This pump is capable of pumping up to 150 feet from ground level by simply connecting it to a 12 volt battery. Use with the PA-10700 (Power Booster	It comes supplied with 160 feet of heavy duty 10 gauge wire and a green connector and mounted on a high impact plastic reel.			
2) or the PA-10750 (Low Flow with Power Booster 2) Controllers.	24 VOLT / LENGTH — 26"			
WSP-24V-6 (Mega-Monsoon [®])				
This pump is capable of pumping up to 200 feet from ground level by simply connecting it to a 12 volt battery. Use with the PA-10850 (Low Flow with Power Booster 3)	It comes supplied with 210 feet of heavy duty 10 gauge wire and a blue connector and is mounted on a high impact plastic reel.			
Controller.	24 VOLT / LENGTH — 26"			